



B-Series Cove Lite

Designed for convenience in applications of Cove Lighting
 Six lamps per foot, 2" o.c. spacing
 Specify **.9 Watt Lamps (15,000+ hours),**
1.8 Watt Lamps (10,000 hours) or
2.8 Watt Lamps (5,000+ hours)
 Re-lamp capacity for years of continual service
 Low temperature of lamp allows for re-lamping with system on
 Available maximum 20'-0" length for .9 Watt or 1.8 Watt Lamps
 Available maximum 10'-0" length for 2.8 Watt Lamps
 Fixture is available in custom length or may be field cut to shorten
 Fixtures are 24 volt
 Widespread light distribution in either horizontal or vertical positions
 Lamps wired in parallel, mounted in polyvinyl extrusion – ready for installation
 For extra long runs, two 20' lengths can be center fed
 (.9 Watt Lamp and 1.8 Watt Lamp only)
 Can be dimmed on primary side of step-down transformer
 Visible surfaces of the extrusion may be painted to match or become a part of the molding design
 Factory kerfing for radius applications (possible additional cost)
 Mounting holes pre-drilled for screw or nail attachment

SERIES




B-Series Cove Lite

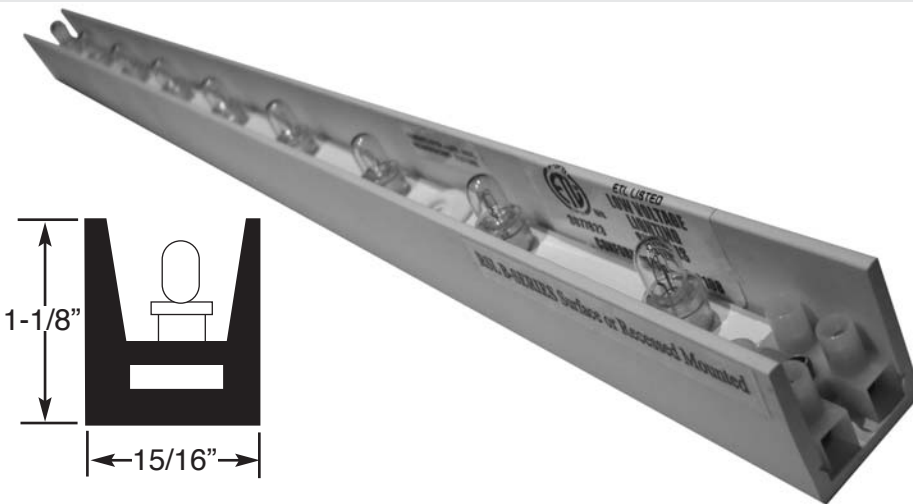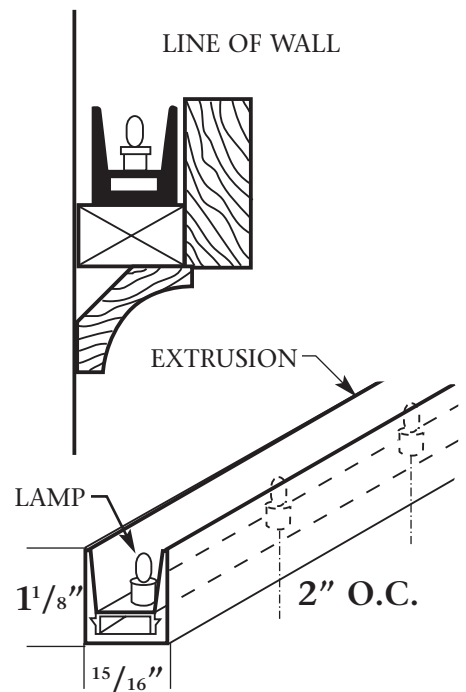

Designed for convenience in cove lighting applications, Roberts' B-Series extrusions are the perfect solution for highlighting ceiling moldings whose beauty may not be adequately enhanced by normal lighting. The B-Series is available in a choice of lamp wattage, and may be relamped with the system on. As with all Step-Lite Systems, the Roberts staff is available to assist in design, project layout and/or to size transformers for specific projects.

SPECIFY BY CATALOG NUMBERS

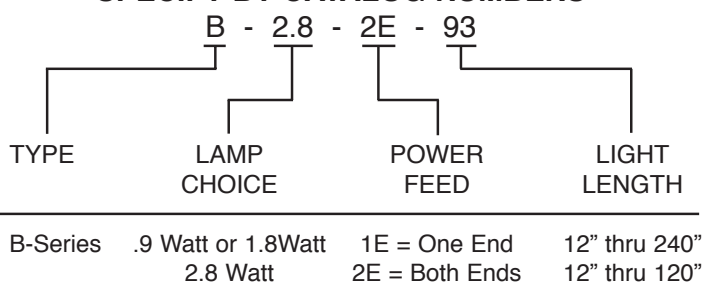

Note: Do Not use 2.8 watt Lamp in shining down application.



©2008

8413 Mantle Avenue
 Oklahoma City, OK 73132
405-728-4895
1-800-654-8268
 FAX: 405-728-4878
 info@robertssteplite.com