

LED Slim Line


- Slim line contour of continuous light
- Low temperature, warm to the touch
- 12 Volt DC for economical power use
 - 50,000 hour continuous lamp life
- Completely dimmable light system
 - Dimmable and non-dimmable drivers are available
 - Drivers are installed remotely with secondary wiring running back to the light locations
- Custom lengths manufactured to the nearest 1/4 inch
- Maximum fixture length is 15 feet
- Housing is white extruded UV stabilized plastic
- Clear or frosted lens cover with UV inhibitors
- Can be mounted with mounting clips (included), VHB or silicone adhesive
- Dry/Damp Rated
- UL 94-VO flammability rated
- Lead wires are 18", standard length. Longer lead lengths available up to 20'

SERIES RA LED

The RA Slim Line provides a narrow contour of continuous light for applications that specify the illumination of cabinets, displays/fixtures, railing, handrails, coves, and soffits. Any decor application that requires beautiful illumination in a manageable form is a great match for the Slim Line fixture.


*Required flex to allow fixture to snap into place.

RA SERIES CLIP

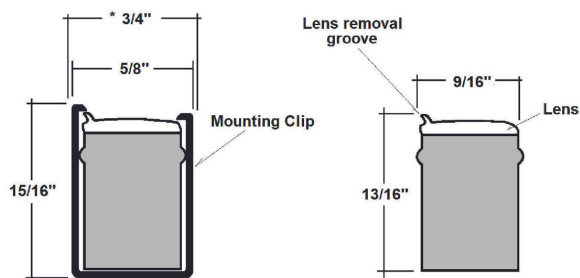

*See mounting clip product sheet for more details

HOTEL RESTROOM:

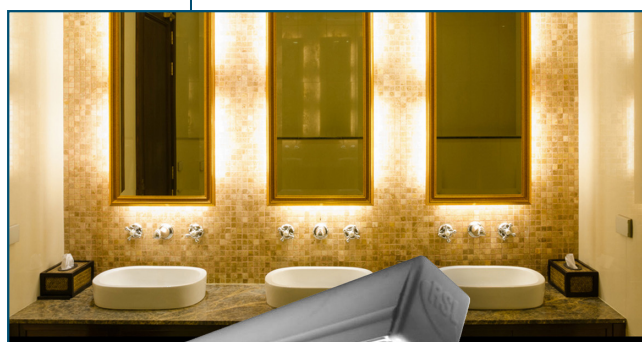

RA Slim Line LED



RA - 24 - 2700K - 240/m - 5w/m - 91" - FL
 Fixture Type Voltage Color LED/m Watts/m Length Lens

CL FL
 Clear or Frosted





Standard (12vdc) LED options *Great for circuits requiring up to 60w.

CCT/COLOR	LED/M	LED SPACING	POWER CONSUMPTION	LUMEN OUTPUT +/- 10%	CRI
2700K	60	.66"	1.5w/ft - 5w/m	95/ft - 316/m	80+
2700K	78	.50"	2w/ft - 6.4w/m	123/ft - 410/m	80+
3000K	60	.66"	1.5w/ft - 5w/m	116/ft - 387/m	80+
3000K	78	.50"	2w/ft - 6.4w/m	120/ft - 401/m	80+
4000K	60	.66"	1.5w/ft - 5w/m	128/ft - 428/m	80+

Standard (24vdc) LED options *Great for circuits requiring up to 96w.

CCT/COLOR	LED/M	LED SPACING	POWER CONSUMPTION	LUMEN OUTPUT +/- 10%	CRI
2700K	240	.165"	1.5w/ft - 5w/m	143/ft - 480/m	90+
2700K	240	.165"	3w/ft - 10w/m	269/ft - 900/m	90+
3000K	240	.165"	1.5w/ft - 5w/m	156/ft - 520/m	90+
3000K	240	.165"	3w/ft - 10w/m	288/ft - 960/m	90+
4000K	240	.165"	1.5w/ft - 5w/m	165/ft - 550/m	90+
4000K	240	.165"	3w/ft - 10w/m	305/ft - 1020/m	90+

SERIES RA LED

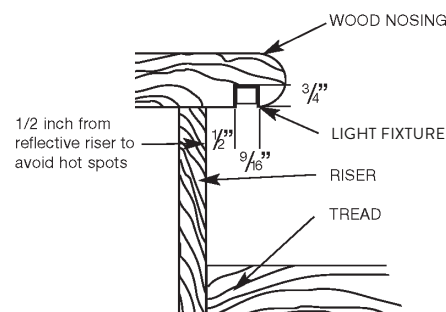

Custom fabricated fixtures are manufactured to the exact dimension required. Each LED fixture is built with an 18" lead wire from one end.

NOTE: various fixtures permit the client to specify from which end the lead wires exit. The maximum fixture length for any type is 15 feet (180 inches.)

Please consult with an RSL representative for solutions on extra-long lengths. When pricing, always round up to the nearest half foot.

