


LED Slim Line

- Slim line contour of continuous light
- Low temperature, warm to the touch
- 12v DC or 24v DC options available
 - 50,000 hour continuous lamp life
- Completely dimmable light system
 - Dimmable and non-dimmable drivers are available
 - Drivers are installed remotely with secondary wiring running back to the light locations
- Custom lengths manufactured to the nearest 1/8 inch
- Maximum fixture length is 15 feet
- Housing is white extruded UV stabilized plastic
- Clear or frosted lens cover with UV inhibitors
- Can be mounted with mounting clips (included), VHB or silicone adhesive
- Dry/Damp Rated
- UL 94-VO flammability rated
- Lead wires are 18", standard length. Longer lead lengths available up to 20'

SERIES RA LED

The RA Slim Line provides a narrow contour of continuous light for applications that specify the illumination of cabinets, displays/fixtures, railing, handrails, coves, and soffits. Any decor application that requires beautiful illumination in a manageable form is a great match for the Slim Line fixture.

RA SERIES CLIP

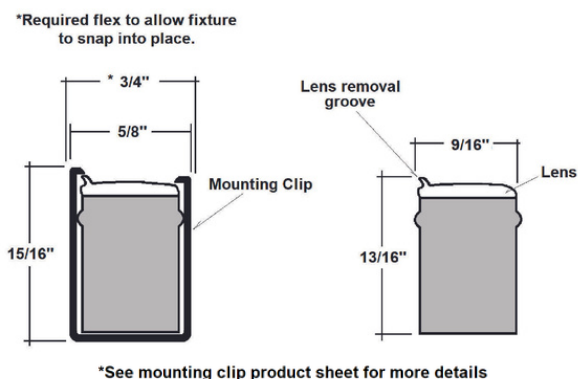

HOTEL RESTROOM:



RA - 24 - 2700K - 240/m - 5w/m - 91" - FL

Fixture Type Voltage Color LED/m Watts/m Length Lens

CL FL
Clear or Frosted





Standard (12vdc) LED options *Great for circuits requiring up to 60w.

CCT/COLOR	LED/M	LED SPACING	POWER CONSUMPTION	LUMEN OUTPUT +/- 10%	CRI
2700K	60	.66"	1.5w/ft - 5w/m	95/ft - 316/m	80+
2700K	78	.50"	2w/ft - 6.4w/m	123/ft - 410/m	80+
3000K	60	.66"	1.5w/ft - 5w/m	116/ft - 387/m	80+
3000K	78	.50"	2w/ft - 6.4w/m	120/ft - 401/m	80+
4000K	60	.66"	1.5w/ft - 5w/m	128/ft - 428/m	80+

Standard (24vdc) LED options *Great for circuits requiring up to 96w.

CCT/COLOR	LED/M	LED SPACING	POWER CONSUMPTION	LUMEN OUTPUT +/- 10%	CRI
2700K	240	.165"	1.5w/ft - 5w/m	143/ft - 480/m	90+
2700K	240	.165"	3w/ft - 10w/m	269/ft - 900/m	90+
3000K	240	.165"	1.5w/ft - 5w/m	156/ft - 520/m	90+
3000K	240	.165"	3w/ft - 10w/m	288/ft - 960/m	90+
4000K	240	.165"	1.5w/ft - 5w/m	165/ft - 550/m	90+
4000K	240	.165"	3w/ft - 10w/m	305/ft - 1020/m	90+

SERIES RA LED

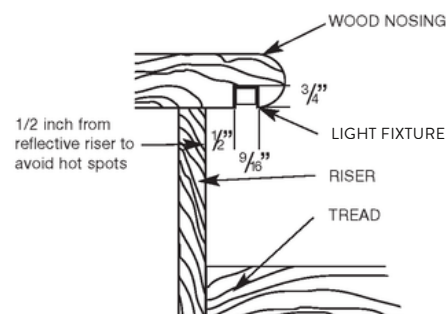

Custom fabricated fixtures are manufactured to the exact dimension required. Each LED fixture is built with an 18" lead wire from one end.

NOTE: various fixtures permit the client to specify from which end the lead wires exit. The maximum fixture length for any type is 15 feet (180 inches.)

Please consult with an RSL representative for solutions on extra-long lengths. When pricing, always round up to the nearest half foot.



LED Slim Line Step-Light

SERIES RA12 LED

	DESCRIPTION	RATING	NOTES
DIM	60w. Dimmable -Magnetic, 120v/ 12v DC	UL/3R	ETL System Listed with RSL LEDs
	240w. Dimmable -Magnetic, 120v/ 12v DC	ETL/3R	ETL System Listed with RSL LEDs
	60w. Dimmable - 277v Driver	UL/3R	Call for pricing - Allow 3 weeks for delivery
	240w. Dimmable - 277v Driver	ETL/3R	Call for pricing - Allow 3 weeks for delivery
NON DIM.	35w. Indoor/Outdoor LED Driver	UR	Non-Dimmable
	60w. Indoor/Outdoor LED Driver	UR	Non-Dimmable

12 VOLT



DRIVER POWER - FIXTURE LENGTH MAX

RSL's recommended fixture lengths/driver

		1.9 Watts	1.5 Watts
DIM	60w. Driver	25'	32'
	240w. Driver (4-60w. drivers)	101'	128'
NON DIM.	35w. Driver	14'	18'
	60w. Driver	25'	32'

TEMP (K)	COLOR	BRIGHTNESS LUMENS/FOOT	LED SPACING	CRI	POWER CONSUMPTION WATTS/FOOT
2700K	WARM WHITE	94	16.7 mm/.66"	80+	1.5
2700K-HB	WARM WHITE-HB	124	8.3 mm/.5"	80+	1.9
3000K	SOFT WHITE	117	16.7 mm/.66"	80+	1.5
3000K-HB	SOFT WHITE - HB	121	12.8 mm/.5"	80+	1.9
4000K	NEUTRAL WHITE	129	16.7 mm/.66"	80+	1.5

■ Other colors available, call RSL for details.

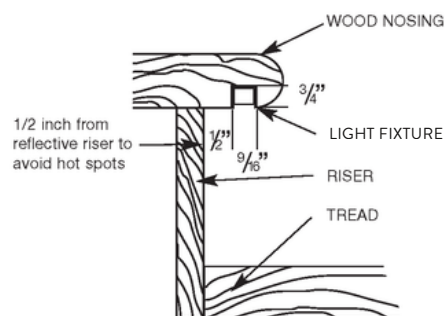

Custom fabricated fixtures are manufactured to the exact dimension required. Each LED fixture is built with an 18" lead wire from one end.

NOTE: various fixtures permit the client to specify from which end the lead wires exit. The maximum fixture length for any type is 15 feet (180 inches.)

Please consult with an RSL representative for solutions on extra-long lengths. When pricing, always round up to the nearest half foot.

