



60 Watt Single Output Driver

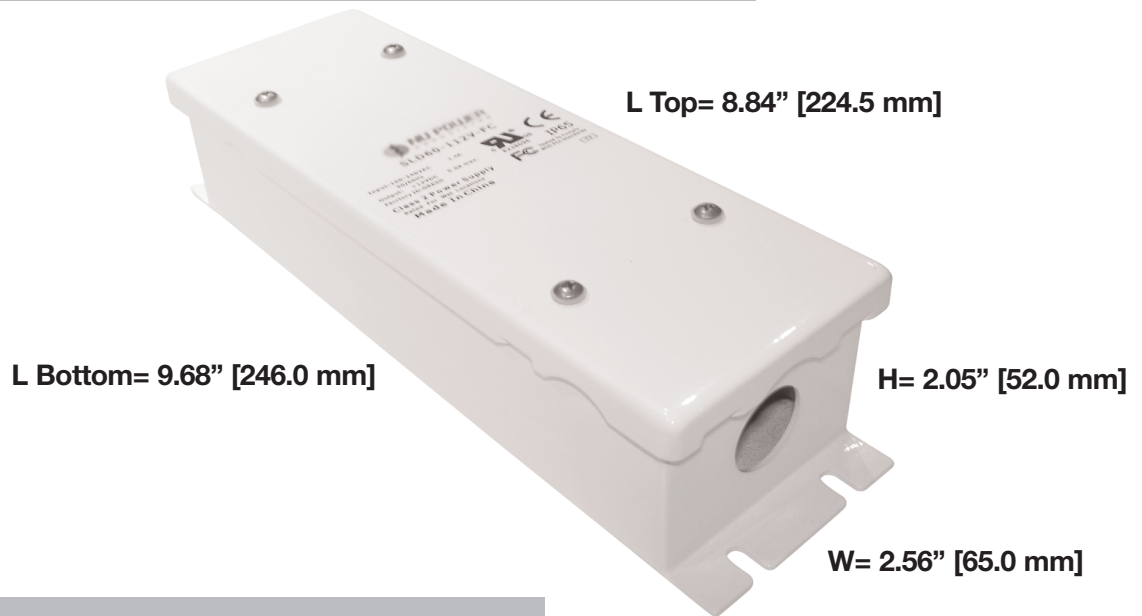


120 Watt Dual Channel

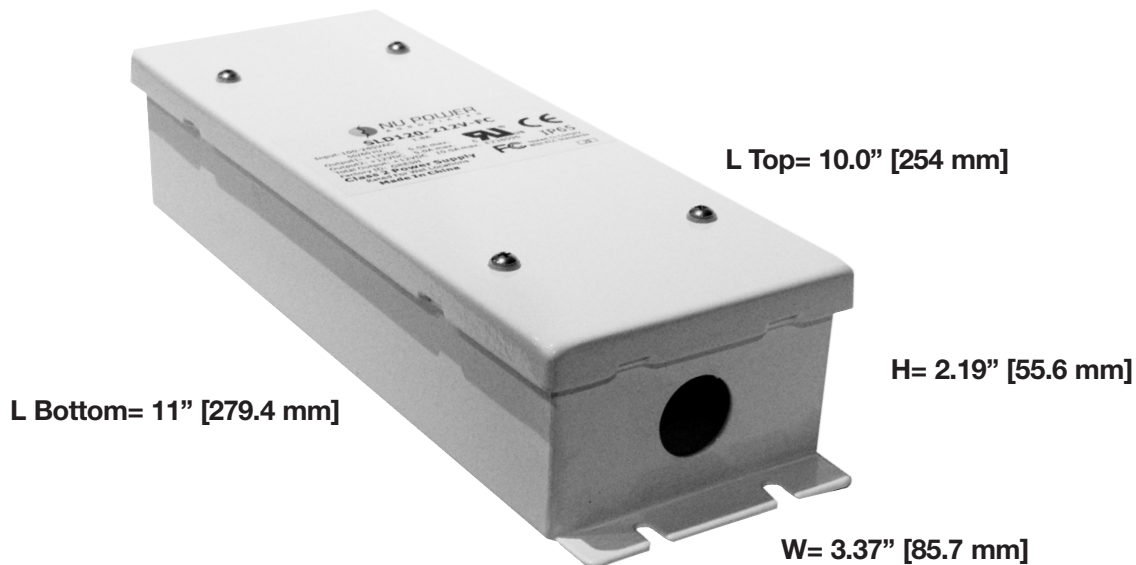

AC Input Wires		DC Output Wires	
Color	Input	Color	Output
White	Neutral	Red	V out
Black	Line	Black	DC Gnd Return
Green/Yellow	AC Ground		

Input Specifications

- Voltage Range 90-264 VAC
- Frequency Range of 47-63 Hz
- EMI/RFI: -CISPR-22 Class B
 - FCC part 15 Class B
 - EMC
- Safety Standard: -UL/CUL 1310, Class 2, Outdoor Wet Locations For UL 48 LED Lighting
 - CE EN60950
- Certifications:  Tested To Comply
With FCC Standards

Output Specifications

- Maximum Power is 60W
- Short Circuit Protection: Hiccup Mode, Auto-recovery

Note: All noise measurements made at the output terminals, connected to a 20Mhz low pass filter

Environmental Specifications

- Cooling: Convection
- Operating Temperature is (-)25 C to +60 C Full Load
- Storage Temperature is (-)40 C to +85 C

Mechanical

- Dimensions: 2.56" W x 8.84"L x 2.05" H inches
- Weight: 1.94 lbs
- Case Design/Material/Color/Internal: NEMA 3/Aluminum
White Potted PCB
- Mounting & Connection: Flange mount, AC/DC Conduit Entries, Knockouts for
1/2" Conduit and fittings

Note: This specification is subject to change without prior notice.