

RA-12 Series Step-Lite

(Replaceable Lamps, 12V only)

12 Volt for economical power use.

1 watt lamps, 3.8 lumens, 2200K color temperature.

Choice of two lamp spacings: **"EB"** 1.2" oc or the **"STD"** 2" oc spacing.

Slim line contour of continuous light, 5/8"w x 3/4"t.

Easy to replace lamps for years of service.

Easily **field shorten** if needed.

Clear polycarbonate lense cover with UV inhibitors.

Low temperature, warm to the touch.

Completely **dimnable** light system.

Can be mounted with mounting clips (included) or silicone adhesive.

Dry/Damp Rated.

"EB" lamps max length **10ft.** – **"STD"** lamps max length **15ft.**

Custom lengths manufactured to the INCH.

10,000 hour continuous lamp life.

Housing is white extruded UV stabilized plastic.

UL 94-VO flammability rated.





Can be powered with either AC or DC power source.

Lead wires are 18", unless ordered longer.

LAMPS INCLUDED.

SERIES

RA-12

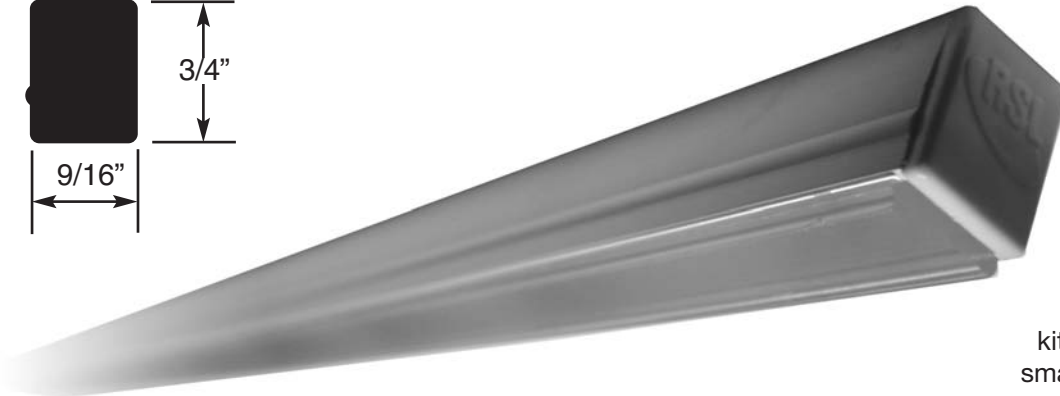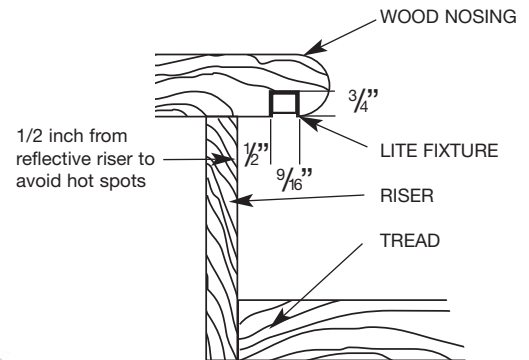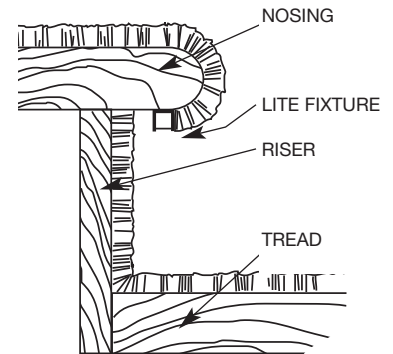


Uses:

Steps, railings, handrails, window dressings, coves, soffits, kitchen cabinets, anywhere you need small bright lighting for years of service.

ORDER/SPECIFY BY CATALOG NUMBERS

RA-12 - EB - FS - 104

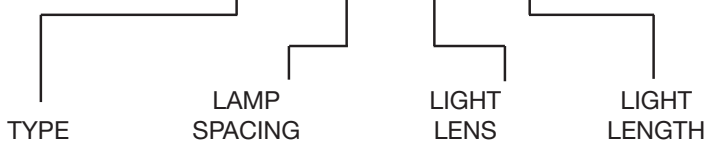

RA-Series	Standard (max length 15ft.) Extra Bright (max length 10ft.)	Clear-CL Frosted-FS	Order custom length to the inch required
-----------	--	------------------------	---




©2008

8413 Mantle Avenue
Oklahoma City, OK 73132
405-728-4895
1-800-654-8268
FAX: 405-728-4878
info@robertssteplite.com

SERIES

RA12

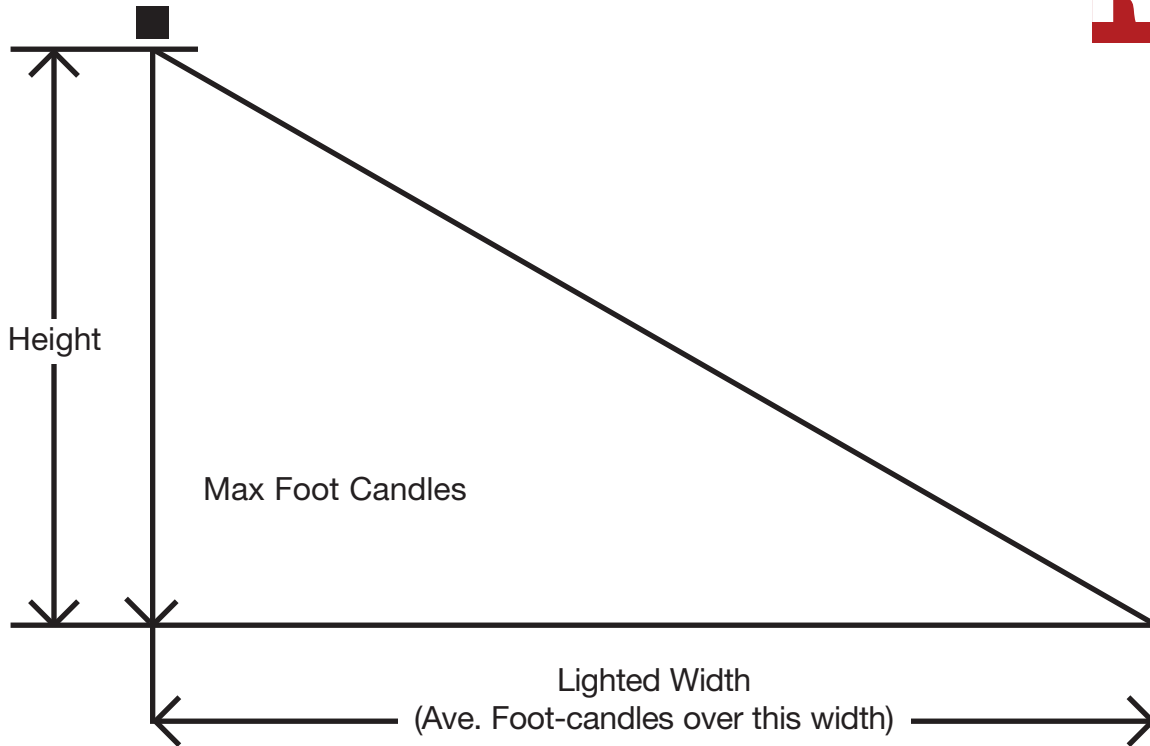

Height above floor in Inches	Lighted width in Inches	RA-12-EB		RA-12-STD	
		Ave.	Max	Ave.	Max
6	6.8	8.7	18.9	5.1	11.6
10	11.3	5.2	11.3	3.1	7.0
12	13.5	4.4	9.4	2.6	5.8
18	20.3	2.9	6.3	1.7	3.9
24	27.0	2.2	4.7	1.3	2.9
30	33.8	1.7	3.8	1.0	2.3
36	40.5	1.5	3.1	0.9	1.9

Foot-candle levels from continuous 36" long light unit.

NOTES:

1. Lighted width to point foot-candle levels falls to 10% maximum.
2. Average foot-candles over lighted width.
3. Foot-candles directly below light unit.
4. Average riser reflectance 30%.



©2008

8413 Mantle Avenue
Oklahoma City, OK 73132
405-728-4895
1-800-654-8268
FAX: 405-728-4878
info@robertssteplite.com